


The 331 and 331B Multisensor for RoomSet are the heart of Helvar RoomSet single-room lighting solution for commissioning classrooms, offices and meeting rooms. For the installer, the automatic preset programming allows for swift out-of-the-box installation, with no configuration needed.

RoomSet supports advanced graphical configuration via an easy-to-use Android app that enables a quick and simple setup for different purposes, such as presentations, lectures or conferences, or for daylight-harvesting. For commissioning large numbers of rooms, the RoomSet app allows copying room layouts, thus making the commissioning process faster and consequently more cost-effective.


The Multisensor for RoomSet has a light sensor for constant-light control, and a passive infrared (PIR) presence detector to provide energy-saving functions in a DALI system. It also hosts a microcontroller running RoomSet firmware with Bluetooth® low-energy connectivity to allow tablet-based configuration.

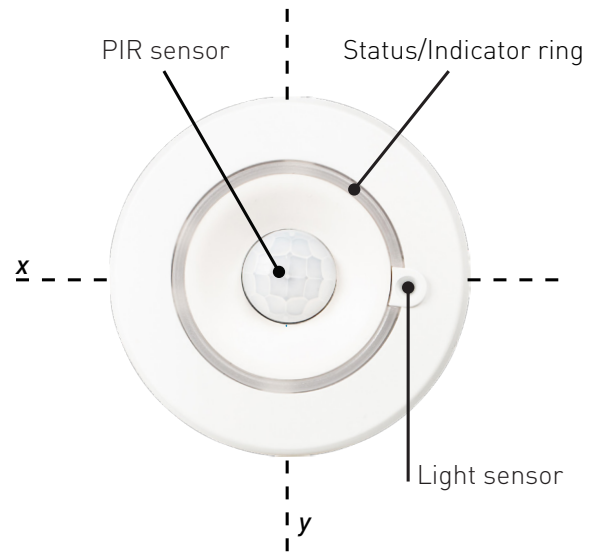



**Key Features**

- Excellent detection performance through high sensitivity and multidirectional coverage.
- Automated addressing and defaults programming to allow installer testing.
- Functional system just by powering on the sensor.
- Drag-and-drop graphical configuration of rooms with an intuitive Android app.
- Over-the-Air upgrades via the RoomSet app to keep the system up to date with the latest available functionality.
- Programmable constant-light control for energy efficiency.
- Cost-effective deployment of large numbers of rooms.


**Constant Light Coverage at 2.5 m Height**

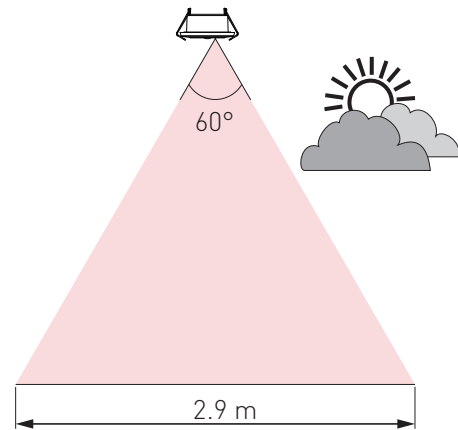

**Presence Detection Coverage at 2.5 m Height**

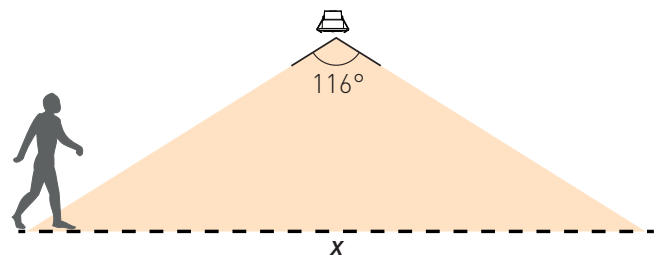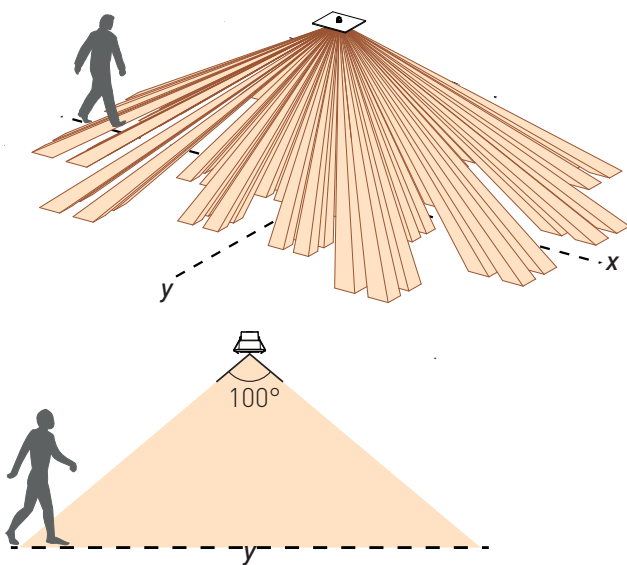

**Detection pattern at floor level for 2.5 m mounting height**

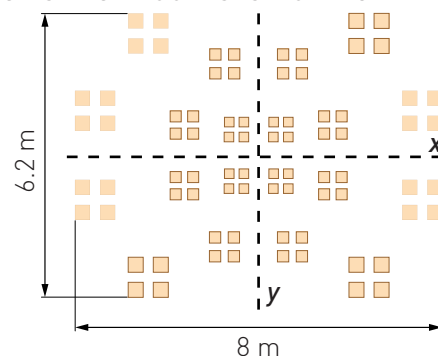

## Connections

DALI:	Removable connector block
Bluetooth®:	BLE 4.1
Wire section:	0.5 mm <sup>2</sup> – 1.5 mm <sup>2</sup> solid or stranded
Cable rating:	All cables must be mains rated.

## Power

DALI supply input:	9.5 V – 22.5 V
DALI current consumption:	40 mA

## Sensors

Light sensor:	For constant-light functions
Presence detector:	Passive infrared (PIR)

## Mechanical data

Max. recommended mounting height:	4 m
Presence detection coverage area:	46 m <sup>2</sup> @ 2.5 m mounting height
Mounting hole diameter:	51 mm +/- 1 mm

*Note: If replacing older sensor then 52 mm to 55 mm mounting hole is acceptable.*

Ceiling thickness:	Maximum 25 mm
Bezel diameter:	66 mm
Recommended clearance depth:	10 cm (with cable cover, incl. 5 cm for cabling)
Material (casing):	Nonflammable PC/ABS (UL94-V0)
Finish / Colour:	331: Semi-matt / White RAL 9003 331B: Semi-matt / Anthracite Grey RAL 7016

Weight:	56 g
IP code:	IP30 [IP20 cable cover]

## Operating and storage conditions

Ambient temperature:	0 °C to +50 °C
Relative humidity:	Max. 90 %, noncondensing
Storage temperature:	-10 °C to +70 °C


## Conformity and standards

DALI standard:	IEC 62386
EMC emission:	EN 61000-6-3
RED:	EN 300328 EN 301489-17
EMC immunity:	EN 61547
Safety:	EN 61347-2-11
Environment:	Complies with WEEE and RoHS.

## RoomSet compatibility

<b>Device:</b>	Tablet (9.7" screen or larger recommended)
<b>Software:</b>	Android 6.0.2 or later BLE 4.1 or later

## Connections

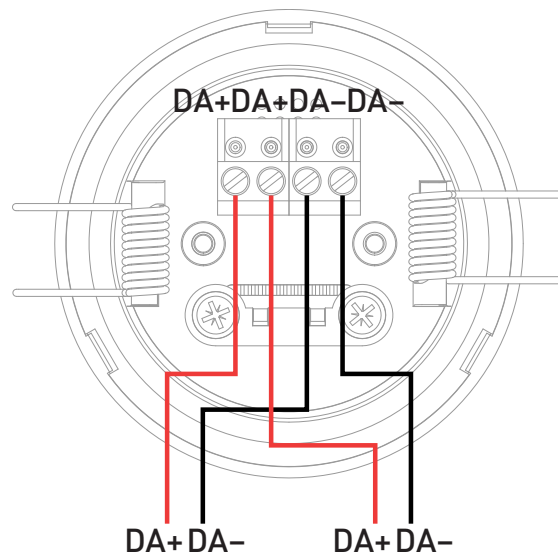

## Dimensions (mm)

